



Cloud UC User Manual

Welcome to Lingo's Cloud UC

Welcome to the Cloud UC Service Manual and the Lingo family. We strive to provide you with the highest-quality service for all of your telecommunications needs. We are confident that the services and features provided will enhance and maximize your office productivity.

This easy-to-follow guide provides step-by-step instructions to help you get started in creating, customizing, and utilizing your phone services while enhancing your business capabilities.

If you have any questions about your services, or need assistance, please contact our customer support at **855-678-1901** or customersupport@lingo.com.

You can also visit us at lingo.com or manage your account features online at vportal.lingo.com.

For additional service information visit lingo.com or Account Management options online at my.lingo.com.

Table of Contents

1.	Logging in to My Account	4
2.	Manage Username and Password	5
3.	Portal Home Page	6
4.	Creating a Time Frame	7
5.	Adding Answer Rules	11
6.	Configuring Voicemail	15
7.	Voicemail Instructions	18
8.	Voicemail Menu Tree	19
9.	Placing a Call	20
10.	Answering a Call	21
11.	Microphone Mute, Call Hold and Resume	21
12.	Call Forwarding	22
13.	Call Transfer	22
14.	Redial	23
15.	Cloud Call Recording	23
16.	Do Not Disturb	25
17.	Call Lists	25
18.	Contact Directory and Speed Dialing	26
19.	Search For and Edit Contacts	27
20.	Ring Type	28
21.	Distinctive Ringing/Call Treatment	28
22.	Headset Memory Mode	29
23.	Supported Star Codes	29

Contacts

Customer support:

 855-678-1901

@ customersupport@lingo.com

my.lingo.com

lingo.com



My Account Login

Log in to manage features online at vportal.lingo.com.



The image shows a login form for Lingo. At the top is the Lingo logo, which consists of three green circles of varying sizes to the left of the word "Lingo" in a blue sans-serif font. Below the logo are two input fields: the first is labeled "Login Name" and the second is labeled "Password". Below these fields is a blue button with the text "Log In" in white. At the bottom of the form, there is small text that reads "Powered by Impact Telecom" and "Manager Portal: Version 1224-0.3".

Use your username: yourextension@yourdomain

Password: Digits only (5-10 characters)


Check your credentials with your administrator.



Manage Username and Password

To change your password, first click on Profile on the top right of the screen. Then scroll down to Change Password and enter a new password between 5 and 10 digits. Your password must be all digits.

Please note that this password will also function as your voicemail password.

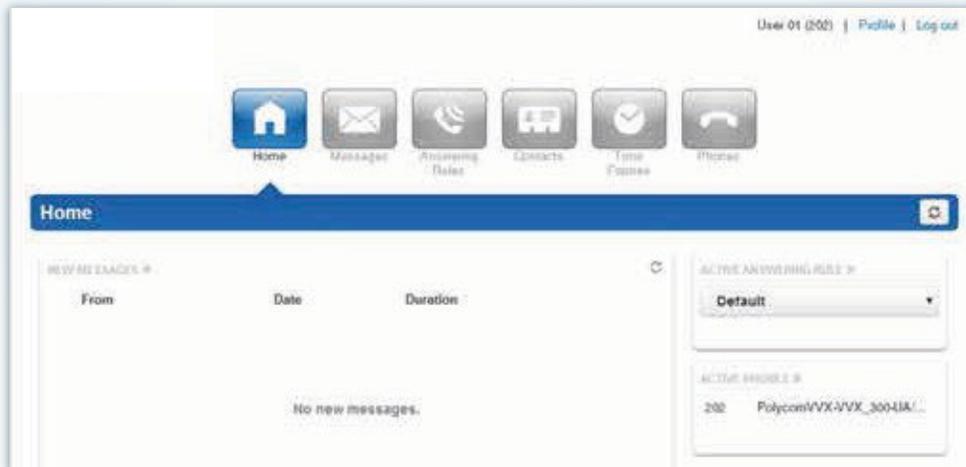

Profile

First Name: User
Last Name: 01
Timezone: US/Central
Email Address(es): ext002@impacttelecom.com
Directory Options: Announce in Audio Directory
 List in Directory

Caller ID Information

Area Code: 425
Caller ID: 4252010998
911 Caller ID: 4252010998

Change Password

New Password:
Note: Password must be numbers only.
Confirm New Password:

Cancel Save

Portal Homepage

Upon login, you will see this homepage with options on the top offering you various menu items to select.

The screenshot displays the Portal Homepage interface. At the top right, it shows the user information: "User 01 (202) | Profile | Log out". Below this is a navigation bar with six icons: Home (selected), Messages, Answering Rules, Contacts, Time Frames, and Phones. A blue header bar with the text "Home" and a refresh icon is positioned below the navigation bar. The main content area is divided into several sections:

- NEW MESSAGES**: A table with columns "From", "Date", and "Duration". The content area is empty, displaying "No new messages."
- RECENT CALL HISTORY**: A table with columns "Number", "Name", "Date", and "Duration". The content area is empty, displaying "No recent calls."
- ACTIVE ANSWERING RULE**: A dropdown menu currently set to "Default".
- ACTIVE PHONES**: A list showing one active phone: "202 PolycomV VX-VVX_300-UA/..".



Creating a Time Frame

Time Frames are used to enact when **Answering Rules** are to be applied. An **Answering Rule** MUST have a **Time Frame** assigned to it. There are three different **Time Frames** that can be created:

- Always
- Certain days of the week and times; *e.g., work hours*
- Specific dates or ranges; *e.g., observed holidays or vacation schedules*



- Select the **Time Frames Icon** from the Bar at the Top of the screen.



- You will now be directed to the **Time Frames** landing page.

- Select **Add Time Frame** from the upper right hand corner.

The first time frame to be created is an **Always** timeframe. This will apply when no other time frame is applicable.

Add a Time Frame

Name: Note: Name cannot be changed

When:

- Always
- Certain days of the week and times
- Specific dates or ranges



Creating a Time Frame

When setting a **Work Hours** time frame, select **Certain days of the week and times**. Then check the days that are to be used in this time frame and move the sliders to accommodate the range you wish to set.

When you wish to split the range into two; *e.g., morning and afternoon*; then click on the **green plus sign**. This then allows you to set two-time ranges within one day. Continue until your time frame has been configured and then click **Save**.

Add a Time Frame ×

Name Note: Name cannot be changed

When Always Certain days of the week and times

Sunday 12:00 AM 6:00 AM 12:00 PM 6:00 PM 11:59 PM +

Monday 12:00 AM 6:00 AM 12:00 PM 6:00 PM 11:59 PM -

Tuesday 12:00 AM 6:00 AM 12:00 PM 6:00 PM 11:59 PM +

Wednesday 12:00 AM 6:00 AM 12:00 PM 6:00 PM 11:59 PM -

Thursday 12:00 AM 6:00 AM 12:00 PM 6:00 PM 11:59 PM +

Friday 12:00 AM 6:00 AM 12:00 PM 6:00 PM 11:59 PM +


Saturday 12:00 AM 6:00 AM 12:00 PM 6:00 PM 11:59 PM +

Specific dates or ranges



Creating a Time Frame

If setting a timeframe for a **holiday that only lasts one day** enter the date of the holiday in the box on the left **AND** right side and use the slider at the bottom of the mini calendar to set a time that encompasses the whole day, such as 12:00 AM to 11:59 PM. You can use the slider to adjust that the time frame is in effect for a specific day by sliding them left or right.

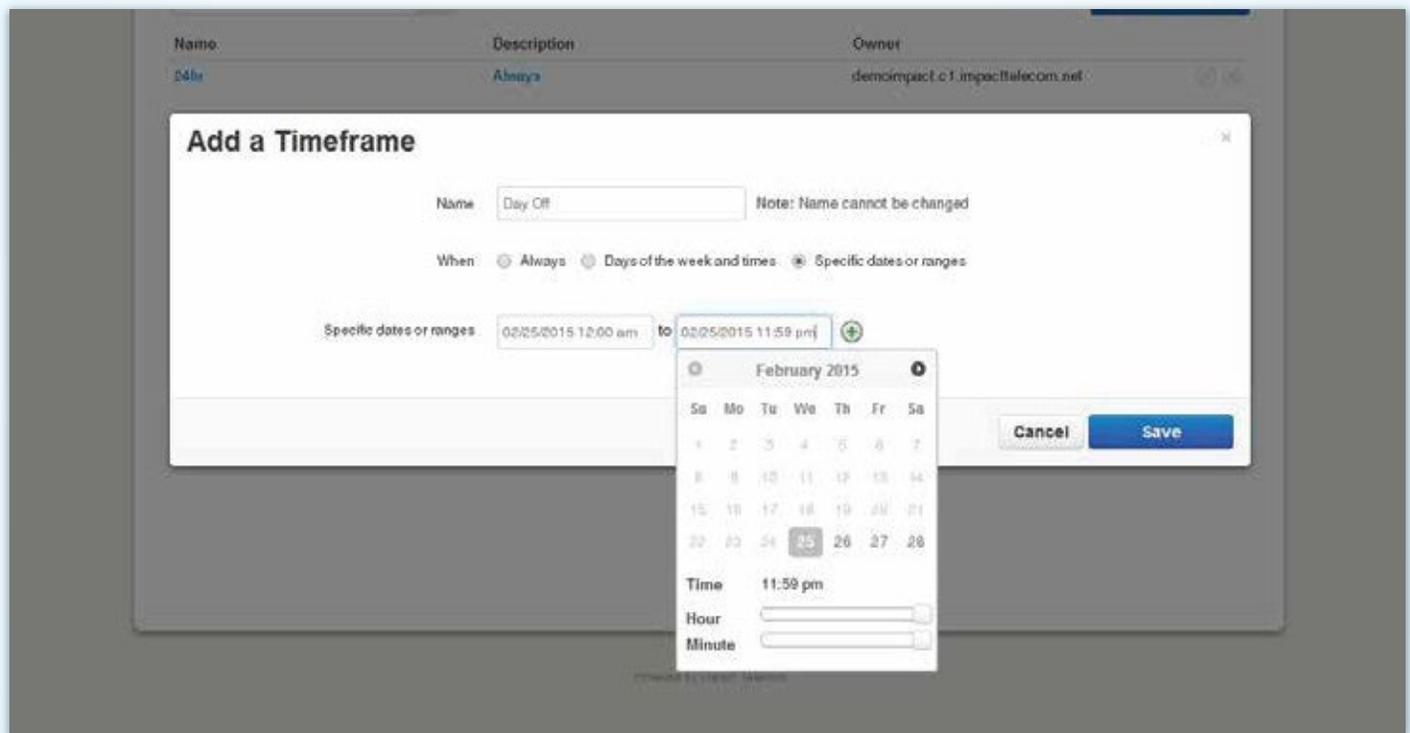



Creating a Time Frame

If setting a time frame for **multiple date ranges with times**, you will need to create multiple rules within the Time Frames by clicking on the green “+” sign to the right of the first rule. You may click on this symbol multiple times to create multiple ranges. The example below shows a Time Frame that accounts for multiple dates that encompass the December Vacation. Note the structure of the rule; the December Vacation starts at 3 p.m. on December 24th so the first rule accounts for that specific day.

The second rule covers the full day of December 25th. The third rule covers the last day, which begins at 12 AM on December 26th and ends at 12 PM on the same day as employees come back to work.

You can also add additional holidays to the existing rule. Here we have added New Year’s Eve as an additional multiple date range holiday.

Note: When a Time Frame with Dates and Times is used to span multiple date ranges in sequential order the *in-between* days will start at 12:00 AM and end at 11:59 PM so the rule must be structured to account for the days *roll over* to link up to the next day.

The screenshot shows the 'Edit December Vacation' dialog box. The 'Name' field is 'December Vacation' with a note 'Name cannot be changed'. The 'When' section has three radio buttons: 'Always', 'Days of the week and times', and 'Specific dates or ranges' (which is selected). Below this is a table of date ranges and times. A red box highlights the first three rows, and a blue box highlights the last three rows. A legend on the right explains the colors: red for 'Full Day Off' and 'End Date and End Time', and blue for 'Start Date and StartTime', 'Linking Day / Day Off', and 'End Date End Time'. A note on the left states 'Note: Two separate holidays contained in one rule.' The dialog has 'Cancel' and 'Save' buttons at the bottom.

Start Date and Time	End Date and End Time	Action
12/24/2014 3:00 pm	12/24/2014 11:59 pm	+ (Green)
12/25/2014 12:00 am	12/25/2014 11:59 pm	X (Red)
12/26/2014 12:00 am	12/26/2014 12:00 pm	X (Red)
12/31/2014 3:00 pm	12/31/2014 11:59 pm	X (Red)
01/02/2015 12:00 am	01/02/2015 11:59 pm	X (Red)
01/03/2015 12:00 am	01/03/2015 8:00 am	X (Red)



Adding Answering Rules

Answering Rules are the rules that instruct the system what do with respect to this Subscriber. They are based on **Time Frames** (different time options including always, specific days and times of the week and specific dates). An Answering Rule must have a Time Frame assigned to it.

On the Homepage select the **Answering Rules** button.

User 01 (202) | Profile | Log out

Home Messages **Answering Rules** Contacts Time Frames Phones

Answering Rules / User 01 (202)


Ring for 25 seconds Allow / Block Add Rule

Time Frame	Description
Default Active	Ring x202




Adding Answering Rules

Select **Add Rule** on the right-hand side of the screen.

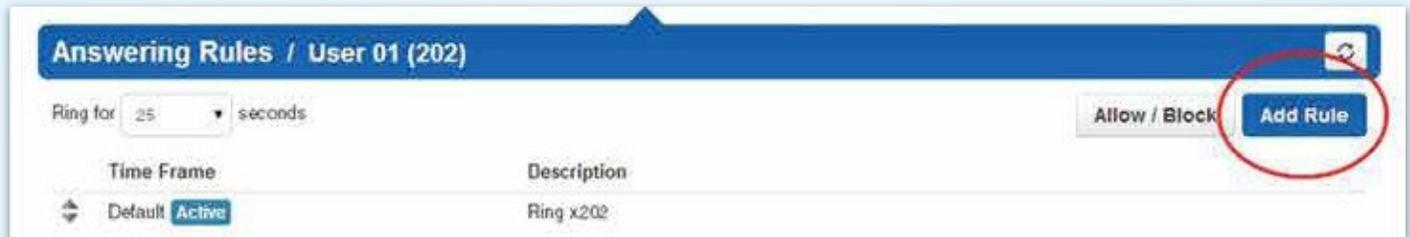

You will be directed to a pop-out windows that contains the **Add an Answering Rule** parameters as shown below:

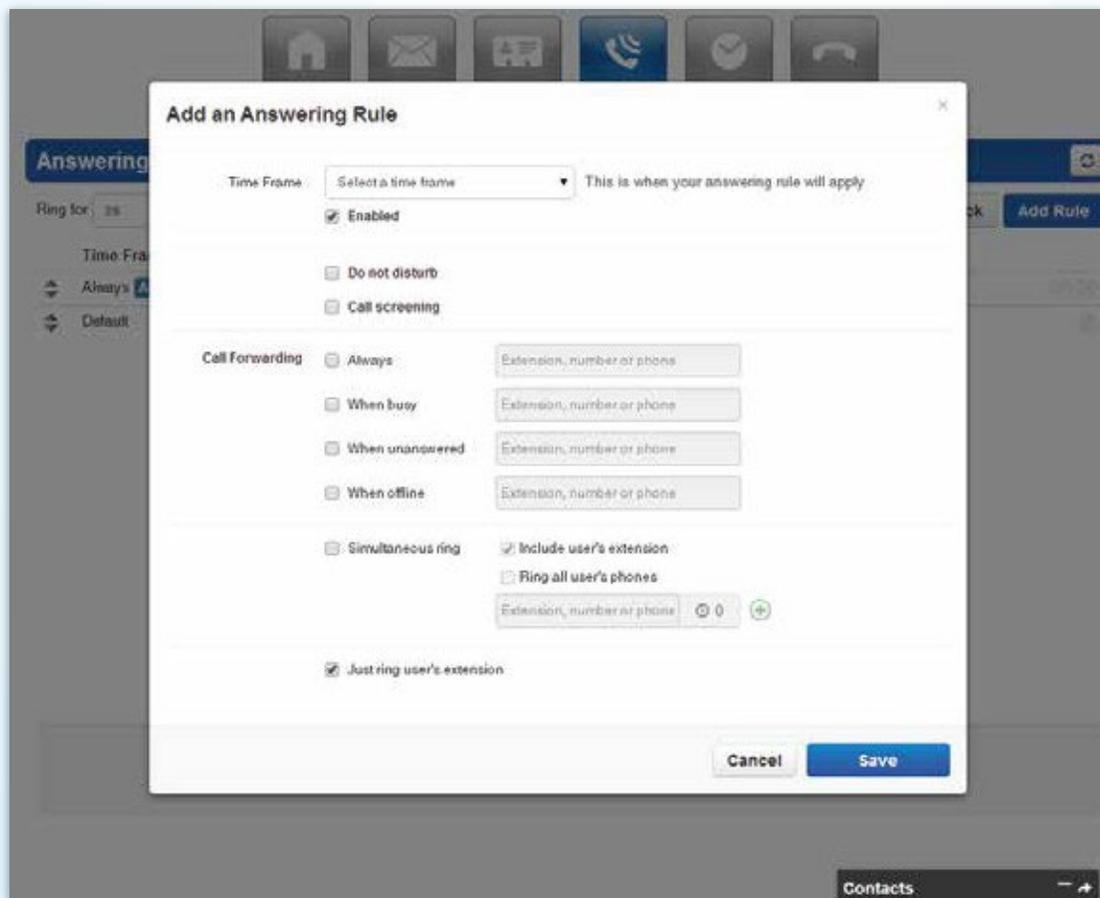



Adding Answering Rules

Time Frame	When the Answering Rule will be in effect.
Do Not Disturb	If selected, then all calls are routed to the user's voicemail.
Call Screening	The system will ask the caller to record his or her name. Then a call will be placed to the user and the user will have a choice of answering the call or sending it to voicemail.
Simultaneous Ring	The system can ring all of the user's phones and other devices or even off-net numbers. In order to add more simultaneous ring locations, click on the green plus sign.
Delayed Simultaneous Ring	The system can ring all of the user's phones and other devices or off-net numbers after a designated delay.
Call Forwarding	There are different options:
<i>Always</i>	<i>If selected, this is the ONLY rule that will apply to incoming calls.</i>
<i>When busy</i>	<i>If the user's device returns a busy signal, then this option will apply to incoming calls</i>
<i>When unanswered</i>	<i>If the user does not answer the device then this option will apply to incoming calls</i>
<i>When o/ine</i>	<i>If the device ever becomes unregistered then this option will apply to incoming calls</i>



Adding Answering Rules

Add an Answering Rule

Time Frame: **Always**
This is when your answering rule will apply

Enabled

Do not disturb

Call screening

Call Forwarding

Always

When busy

When unanswered

When offline

Simultaneous ring

Include user's extension

Ring all user's phones

Just ring user's extension

Cancel Save

In the example shown, an answering rule has been created that will be effective **All the Time**; when a call comes in the system will simultaneously ring the user's extension as well as ring the user's cell phone (858-555-1234) if they do not answer their extension.

If the user has more than one device you would need to check **Ring all user's phones** in order for all phones to ring when a call is placed to the user.

Once the information has been saved you will be sent back to the **Answering Rules** page with the new rule listed as seen below.

Once the answering rule has been created, this is what will be shown on the Answering Rules page.

To change priority of the rule, place your cursor over the Up/Down arrows, click and drag the rule to the top. Make sure it is labeled **Active** if you would like it to be in effect. Rules will go into effect by prioritization; with the first one most often, then the next one, and so on. Make sure to save.


Answering Rules / User 01 (202)

Ring for: 25 seconds


Allow / Block Add Rule

Time Frame	Description
Default Active	Ring x202
Always	Forward when unanswered to (858) 555-1234


Configuring Voicemail

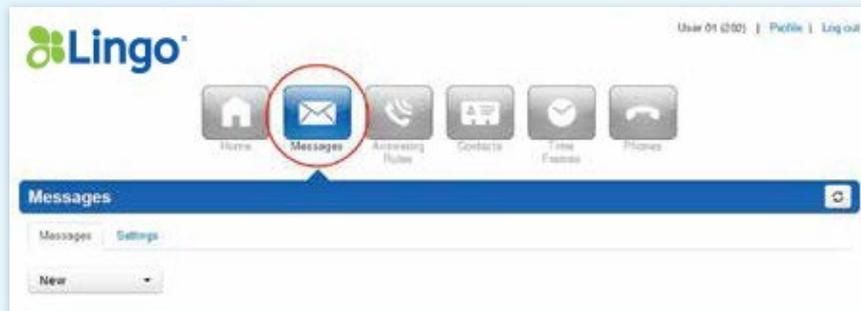

From the Homepage, select **Messages** and click on the tab labeled **Settings**.

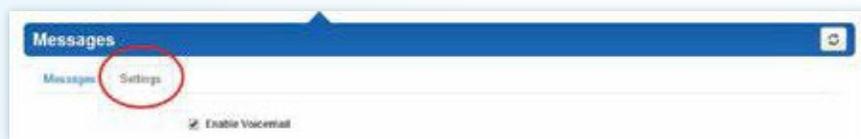

From this tab, various voicemail settings are configured.

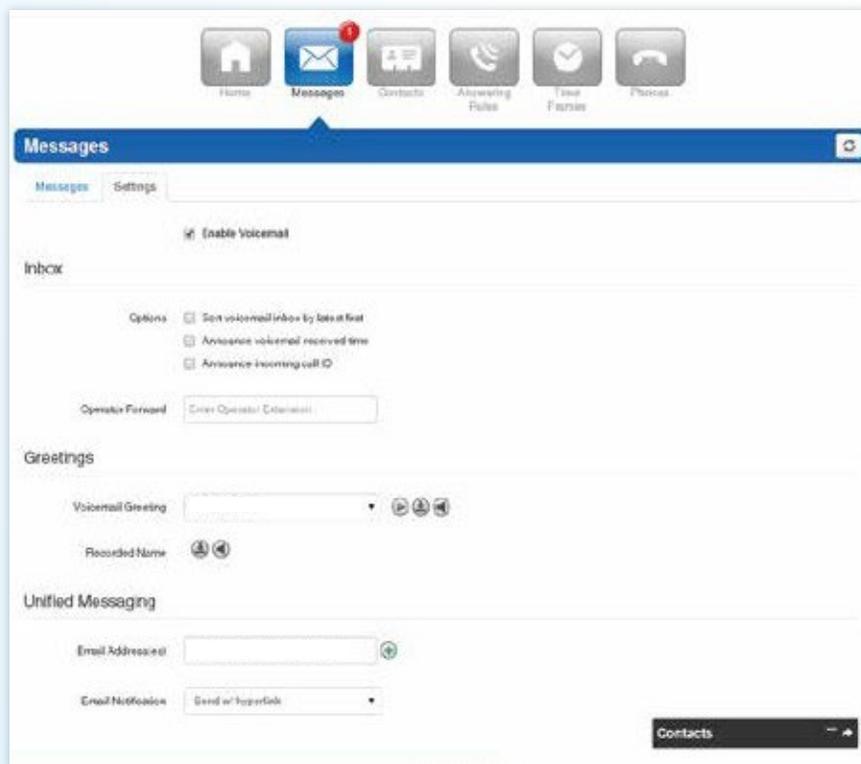

Operator Forward enables users to set a number that a caller can be forwarded to, when the caller presses "0" while listening to the voicemail message. To set this up, in the portal go to Messages, Settings, and then in then in the Operator Forward box put in the extension that calls should forward to when the caller selects "0".

From here you can enable or disable voicemail at any time.

There are various voicemail options for listening to and retrieving messages.


oo Configuring Voicemail

There are **two methods** for managing your voicemail greetings. You can:

- Choose to upload a locally saved file by selecting **Browse** and inserting a file.
- Record a new greeting.




To Add a Greeting select the **speaker icon** from the left of Voicemail greeting.

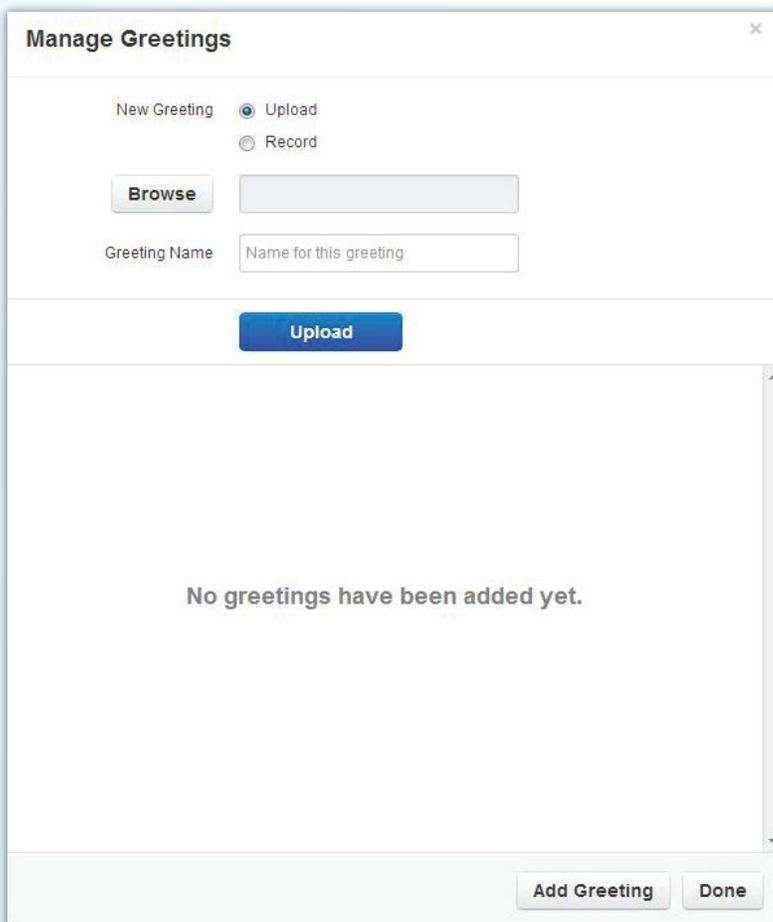

You will be presented with a **Manage Greetings** pop-up box.

If you choose to upload a local file, click the **Upload** radio button. Click **Browse** and upload the file you would like to use.

Configuring Voicemail

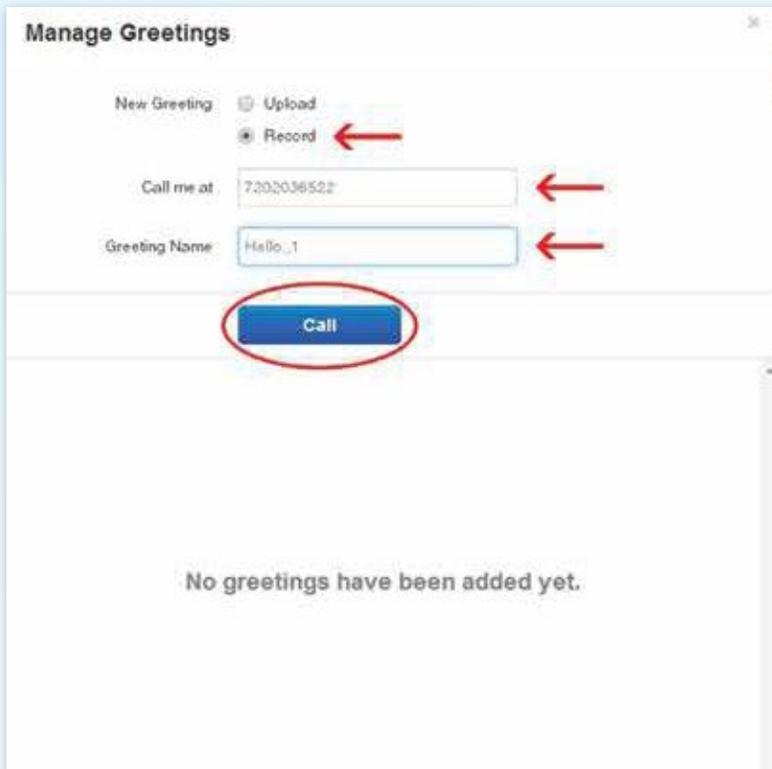

Manage Greetings

New Greeting Upload Record

Call me at: 7202036522

Greeting Name: Hello_1


Call

No greetings have been added yet.

To Record a new greeting select the **Record** button. This will present a new field with a "Call me at" box.

Populate this box with a phone number you would like to be called at. Assign a greeting name to the Recording and select **Call**.

You will then be called by the system IVR and prompted to record your new greeting.

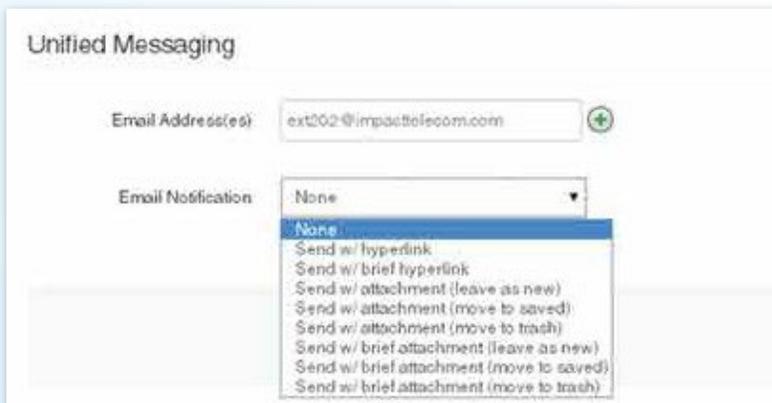

Unified Messaging

Email Address(es): ext202@impacttelecom.com

Email Notification: None

- None
- Send w/ hyperlink
- Send w/ brief hyperlink
- Send w/ attachment (leave as new)
- Send w/ attachment (move to saved)
- Send w/ attachment (move to trash)
- Send w/ brief attachment (leave as new)
- Send w/ brief attachment (move to saved)
- Send w/ brief attachment (move to trash)

Finally, you can select the format in which your email notifications of a voicemail message (if configured) are to be sent.

Options which include a hyperlink and/or in brief format will reduce the size of the email.



Voicemail Instructions

To Access from Device

***98**

System will prompt for password upon entering *98

To Access from Other Phone

Call your phone number and press *

During voicemail greeting prompt, you will be requested to enter a password

When in any menu, press # to go back to the previous menu.

Your voicemail password is the same as your account password.

Main menu

- Press **1** **For New Messages** *Go to Messages*
- 2** **For Old Messages** *Go to Messages*
- 5** **To Set Options** *Go to Options*
- 6** **To Change Greetings** *Go to Greetings*
- 7** **To Recover Deleted Messages**

Greetings

- Press **1** **To Record Greeting**
- 2** **To Review Greetings**
- 3** **To Select Greeting**
- #** **Go To Previous Menu**

Messages PLAYS MESSAGE THEN

- Press **1** **To Save**
- 2** **To Repeat**
- 3** **To Forward**
- 4** **To Delete**
- 5** **For Next Message**
- 6** **To Reply**
- #** **To Finish**

Options


- Press **1** **Change Password**
- 2** **Record Name**

Re-record press 1 (Have multiple greetings)

*** You may not forward your voicemail to a ring group.**



Voicemail Menu Tree

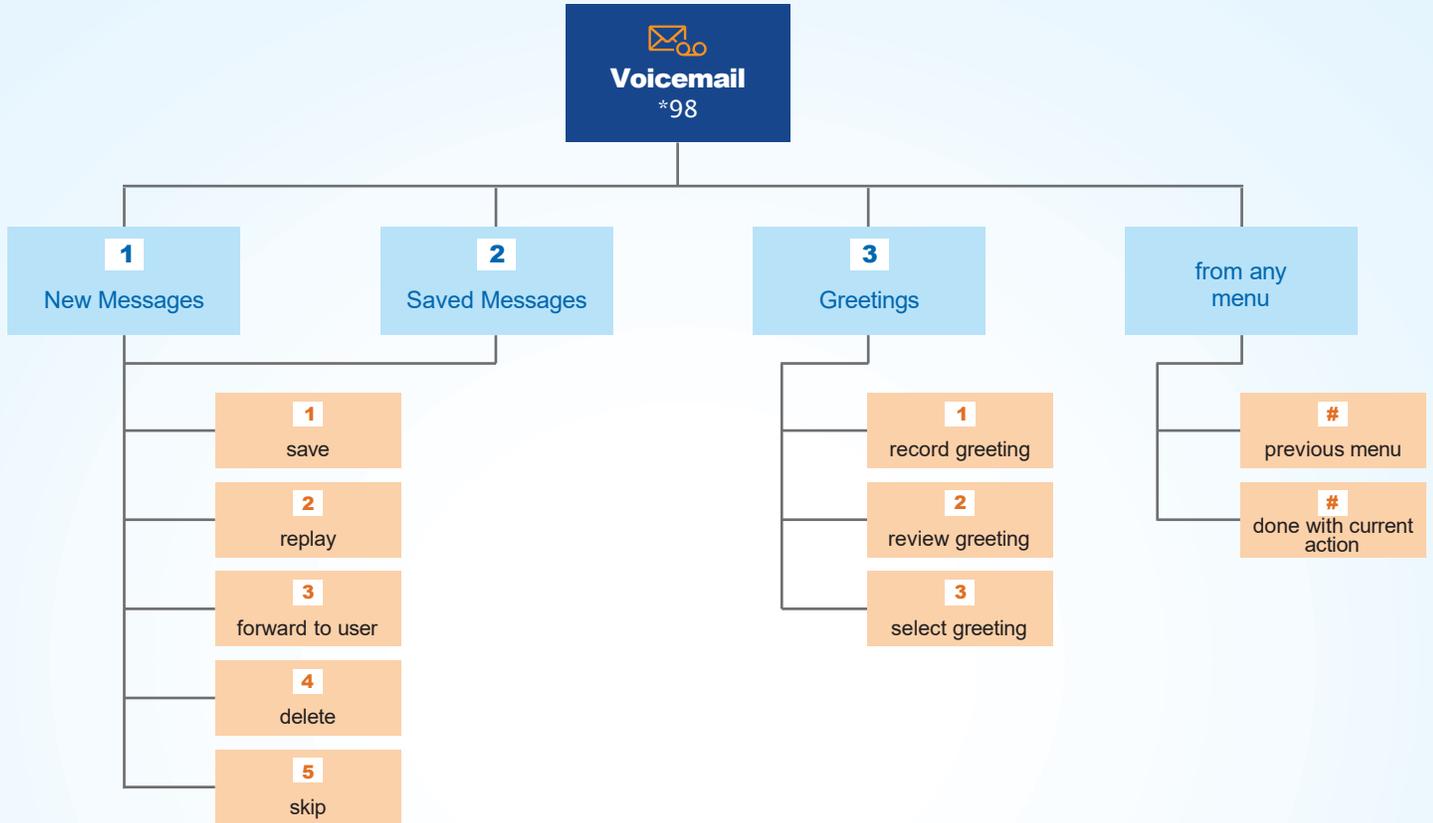

Your voicemail password is your account password.

To manage your voicemail settings, please see the "**Configuring Voicemail**" section.



Placing a Call

Placing a Domestic Call

- To make a call to the United States or Canada, **dial the area code + the phone number**

Placing an International Call*

- To make a call to a country outside of the United States or Canada, **dial 011 + the international phone number**

* You are only able to make an international call if this feature has been enabled for your service.

Using the Handset:

Pick up the handset and dial the number or dial the number first and then pick up the handset.

Using the Hands-free Speakerphone:

1. With the handset on-hook, press:
 - Any assigned line key, or
 - The **NewCall** soft key.
2. Dial the number
Or dial the number, and then press the **Dial** soft key.

Using the Optional Headset:

1. With the headset connected, press:
 - Any assigned line key, or
 - The **NewCall** soft key.
2. Press 
3. Dial the number.
Or, dial the number, and then press 

Note: During a call, you can alternate between handset, headset, or handsfree modes by pressing the  keys, or picking up  the handset.



Answering a Call

Using the Handset:

Pick up the handset.

Using the Speakerphone:

Press:

-  , or
- The line key, or
- The **Answer** soft key.

Using the Optional Headset:

Press 

Note: Incoming calls may be ignored by pressing the **Reject** soft key or **DO NOT DISTURB** during ringing.



Microphone Mute, Call Hold and Resume

Microphone Mute:

During a call, press:  Mute applies to all modes: handset, headset, and hands-free. You can hear all other parties while mute is enabled. To turn off mute, press  again.

Call Hold and Resume:

1. During a call, press **HOLD** or the **Hold** soft key.
2. Press **HOLD** again, the **Resume** soft key, or the line key to resume the call.

Call Forwarding

There are two ways to enable and disable Call Forwarding:

1. In the portal - You can add phone numbers for your phone to forward to Always, When Busy, When Unanswered, and When Offline. When the number is added, simply check or uncheck the box to enable or disable the Answering Rule.

To learn how to set this up, see the section on Adding Answering Rules on page 12.

2.Using Star Codes – Star Codes are short cuts that you can enter directly on your phone. First you have to set up the phone number for your phone to forward to using a certain star code and then you can deactivate and activate it whenever you need to using other star codes. Here's an example for Call Forward Always:

Set "Forward Always" destination (where to always forward your calls)	*72 then Forwarding Number then #
• Deactive Always Forward and have it ring back to your extension again	*73
• Re-activate Always Forward to the number you set using *72	*40

For the other Star Codes including Call Forwarding When Busy, When No Answer, etc. please see page 27 or the separate Star Codes document.

Notes:

- Most phones support Call Forwarding through soft keys on the phone. We do not recommend this method. Please use one of the methods above for the best results.
- Call forwarding is not available on shared lines.
- Please advise your administrator before using this feature. Forwarding lines that are used in hunt groups or other shared features can cause incorrect call distribution.

Call Transfer

To transfer a call:

1. During a call, press **TRANSFER** or the **Trnsfer** soft key (the active call is placed on hold).
2. Place a call to the party which you want to transfer the call.
 - **Internally within the company:** Simply dial the extension
 - **Externally outside the company:** Dial the area code and phone number as shown on page 21.
3. After speaking with the second party, press **TRANSFER** or the **Trnsfer** soft key to complete the transfer.

Notes:

- Press the **Blind** soft key to transfer the call without speaking to the second party.
- Transfer may be cancelled during establishment by pressing the **Cancel** soft key. The original call is resumed.

Redial:

Press the **Redial** soft key or the  to redial the most recently dialed number.

Cloud Call Recording

Hosted Call Recording is an add-on feature available at an additional price and is turned on and off by your office administrator. If you have access to this feature, you will be able to record your calls.

There are 2 types of Cloud Call Recording:


On-Demand Cloud Call Recording enables you to turn call recording on and off by dialing star codes or initiating activation in the web portal.

Continuous Call Recording is turned on and off by your office administrator and enables all your calls to be recorded.

Recordings are available in the web portal for up to 90 days or up until the default storage amount is exceeded.

If it is part of your service, there are 2 ways to enable and disable Cloud Call Recording:

1. In the portal -Turn Hosted Call Recording on and off in the portal by clicking the red recording button in the upper left-hand side of an active call window. A message will appear indicating if call recording has been turned on or has been turned off.

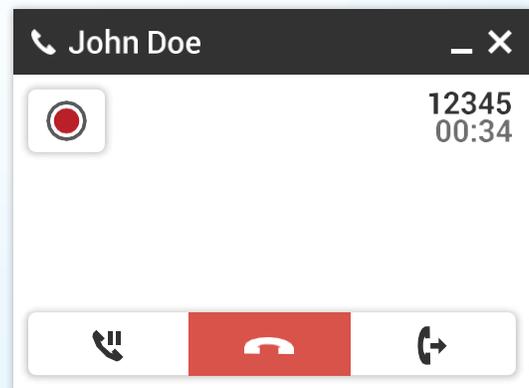



Cloud Call Recording


2. Using Star Codes -Dial the corresponding star codes to turn Hosted Call Recording on and off from your desk phone or your ImpactConnect Hosted PBX Mobile App.

***95** to *Start* Recording

***96** to *Stop* Recording

To listen and manage your call recordings, go to the **Call History** tab in the portal and use the corresponding radio buttons to the right of a recording to listen to or download the recording.

If you would like to forward a recording, download the recording to your computer or local server and send the .WAV file as an email attachment.

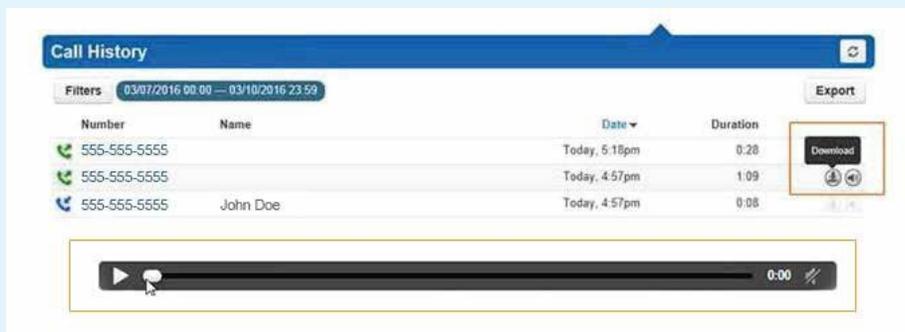



Do Not Disturb

Do Not Disturb:

Press **DO NOT DISTURB** to prevent the phone from ringing on incoming calls. A *Do Not Disturb* icon appears for all lines to confirm that *Do Not Disturb* is enabled.

Press **DO NOT DISTURB** again to turn off *Do Not Disturb*.



Call Lists

Press **DIRECTORIES** followed by Call Lists and Missed, Received, or Placed Calls, as desired. Information on respective calls will be displayed.

From this screen, choose the appropriate soft key:

1. **Edit** to amend the contact number before dialing.
2. **Dial** to place the call.

Or press **More**, then:

1. **Info** to view detailed call information.
2. **Save** to store the contact to the Contact Directory.
3. **Clear** to delete the call from the list.

Press **More** and **Exit** soft keys to return to the idle display.



Contact Directory and Speed Dialing

To add a contact to your local phone directory:

1. Press **DIRECTORIES** and then select **Contact Directory**.
2. Press the **More** soft key, then the **Add** soft key to enter another contact into the phone's database
3. Enter the first and / or last name from the dial pad. Press the 1/A/a soft key to select between numeric and upper / lower case alphanumeric modes. Press the **Encoding** soft key to access special characters in other languages if necessary.
4. Enter a unique contact phone number (not already in the directory).
5. Change the Speed Dial index if desired. It will automatically be assigned the next available index value.
6. Modify the remainder of the fields (Ring Type, Divert Contact, Auto Reject, and Auto Divert) if desired.
7. Press the **Save** soft key to confirm or the **Cancel** soft key to abandon the changes, then press **DIRECTORIES** or the **Exit** soft keys to return to the idle display.

Speed Dialing:

To assign a speed dial index, see Contact Directory instructions above. To dial a contact assigned to a line key, press the corresponding line key.



Search For and Edit Contacts

To search for a contact:

1. Press **DIRECTORIES** and then select **Contact Directory**.
2. Press the **More** soft key, and then the **Search** soft key.
3. Using the dial pad, enter the first few characters for First or Last names.
4. Press the **Search** soft key to search for contacts. Dial successful matches from the resulting search screen.

To edit a contact:

1. Press **DIRECTORIES** and then select **Contact Directory**.
2. Search for contact (see above).
3. Press the **Edit** soft key and make the necessary changes.
4. Press the **Save** soft key to confirm or the **Cancel** soft key to abandon the changes. Press **DIRECTORIES** or the **Exit** soft keys to return to the idle display.



Ring Type

You can select different rings to match your preferences and distinguish between calls on lines.

To change the incoming ring:

1. Press **MENU**
2. Select **Settings**, followed by **Basic**, and then ring type.
3. Using the **▲** or **▼** highlight the desired ring type. Press the **Play** soft key to hear the selected ring type.
4. Press the **Select** soft key to change to the selected ring type.
5. Press the **MENU** or **Exit** soft keys to return to the idle display.

Note:

- If you select silent ring, press the Line key or Answer soft key to answer incoming calls.



Distinctive Ringing / Call Treatment

You can set distinctive incoming ringing tones for different contacts in your local directory.

To set a distinctive ring for a local contact:

1. Press **DIRECTORIES** and then select **Contact Directory**.
2. Search for the contact (see **Contact Directory**)
3. Press the **Edit** soft key and scroll to Ring Type.
4. Enter a number corresponding to one of the ring types available (see **Ring Type** on previous page).
5. Press the **Save** soft key or the **Cancel** soft key to abandon the change, then press **DIRECTORIES** to return to the idle display.



Headset Memory Mode

For Permanent or full-time headset users, there is an option to default all calls to the headset.

To enable Headset Memory Mode:

1. Press **MENU** and select **Settings** followed by **Basic, Preferences,** and **Headset Memory.**
2. Use the **Up** or **Down** arrow keys and press the **Select** soft key to enable Headset Memory Mode.

To disable Headset Memory Mode:

Repeat steps one and two and select **Disable.**

To activate Headset Memory Mode:

Press  twice.



Supported Star Codes

* SUPPORTED STAR CODES	
Action	Code
Set "Forward Always" destination (where to always forward your calls)	*72 then Forwarding Number then #
• Deactivate Always Forward and have it ring back to your extension again	*73
• Re-activate Always Forward to the number you set using *72	*40
Set "Forward When Busy" destination	*41 then the phone number then #
• Deactivate Forward Busy and have it ring back to your extension again	*91
• Re-activate Forward Busy to the number you set using *41	*90
Set "Forward When No Answer" destination	*42 then the phone number then #
• Deactivate Forward No Answer, and have it ring back to your extension again	*93
• Re-activate Forward No Answer to the number you set using *42	*92
To Activate "Reject Anonymous Calls"	*77
To Deactivate "Reject Anonymous Calls"	*87
To Connection w/ Privacy 10 Digit	*67 then 10 digit phone number then #
Call Return	*69
To Transfer Call To Another Extension's Voicemail	*99 then extension then #